

▲ HYUNDAI CONSTRUCTION EQUIPMENT

Head Office (Sales office)

FIRST TOWER, 55, BUNDANG-RO, BUNDANG-GU, SEONGNAM-SI,
GYEONGGI-DO, KOREA

Americas Operation : Hyundai Construction Equipment Americas, Inc.

6100 ATLANTIC BOULEVARD NORCROSS GA 30071 U.S.A
TEL : (1)847-678-823-7802 FAX : (1)847-678-823-7778

Hyundai Construction Equipment Europe N.V

HYUNDAILAAN 4, 3980 TESSENDRLO, BELGIUM

www.hyundai-ce.com

PLEASE CONTACT

2019. 12 Rev.2

MOVING YOU FURTHER

▲ HYUNDAI
CONSTRUCTION EQUIPMENT

R1250-9

*Photo may include optional equipment.



Engine Output

771 PS (567 kW) at 1,800 rpm

Travel Speed

2.3 km/hr / 3.2 km/hr

Operating Weight

118,000 kg / 260,150 lb

WHAT'S NEWEST AND BEST

Gross Power
SAE J1955 / 760 HP at 1,800 rpm

567 kW

Net Power
SAE J1349 / 740 HP at 1,800 rpm

552 kW

Travel Speed
2.0 mph

3.2 km/hr

R1250-9



PRECISION

- Auto Boom-swing Priority
- Computer Aided Power
- Improved Hydraulic System



PERFORMANCE

- CUMMINS QSK23 Engine
- Heavy-duty strength
- Structure Strength
- Excellent Reliability and Durability



PREFERENCE

- Wide Cabin with Excellent Visibility
- Operator Comfort
- Reduced Stress
- Operator - Friendly Cluster



PROFITABILITY

- Enhanced Safety
- Hi-MATE (Remote Management System)
- Easy Access
- Long-Life Components



*Photo may include optional equipment.

PRECISION

Innovative hydraulic system technologies make the 9 series excavator fast, smooth and easy to control.



Auto Boom-swing Priority

This smart function automatically and continuously looks for the ideal hydraulic flow balance for the boom and swing motions of the machine. The advanced CAPO system monitors the hydraulic system and adjusts its settings to maximize performance and productivity.



Improved Hydraulic System

Improved hydraulic valves, precision-designed variable volume piston pumps, fine-touch pilot controls, and enhanced travel functions make any operator running a 9 series look like a smooth operator. Newly improved features include arm-in and boom-down flow regeneration, improved control valve technology and innovative auto boom and swing priority for optimal performance in any application.

Computer Aided Power

The CAPO system also provides complete self diagnostic features and digital gauges for important information like hydraulic oil temperature, water temperatures and fuel level. This system interfaces with multiple sensors placed throughout the hydraulic system as well as the electronically controlled engine to provide the optimum level of engine power and hydraulic flow.

Power Mode

- P** P (Power Max) mode maximizes machine speed and power for mass production.
- S** S (Standard) mode provides a reduced, fixed rpm for optimum performance and improved fuel economy. For maximum fuel savings and improved control.
- E** E (Economy) mode provides precise flow and engine power based on load demand.

User Mode

- U** Some jobs require more precise machine settings. Using the versatile U (User) mode, the operator can customize engine speed, pump output, idle speed and other machine settings for the job at hand.

PERFORMANCE

9 series is designed for maximum performance to keep the operator working productively.

CUMMINS QSK23 Engine

The Tier II compliant, six cylinder, turbo-charged, 4 cycle, water cooled, Cummins QSK23 diesel engine is built for power, reliability, efficiency and reduced emissions.

Heavy-duty strength

Its high-pressure injection (HPI) fuel system (up to 29,000 psi / 200,000 kPa) results in more complete combustion for superior engine response across the entire power curve and the lowest fuel consumption in its class. Its compact and balanced inline six-cylinder design and proven durability in the toughest mine sites make it a great choice to repower vee engines of similar displacement.

The one-piece Ferrous Cast Ductile (FCD) iron pistons and robust cylinder head work to improve long-term durability and dependability. A one-piece cast-iron block, forged-steel crankshaft and a large-diameter camshaft ensure long, reliable performance between overhauls, with the capability of multiple rebuild cycles.



*Photo may include optional equipment.



Structure Strength

The 9 series cabin structure has been fitted with stronger but slimmer tubing for more safety and improved visibility. Low-stress, high strength steel is integrally welded to form a stronger, more durable upper and lower frame.



Excellent Reliability and Durability

Durable full track rail guards keep track links in place. Track adjustment is made easy with standard grease cylinder track adjusters and shock absorbing springs. The strengthened undercarriage is designed for excellent production at quarries and mines.



Operator - Friendly Cluster

The advanced new cluster with 7 inch wide color LCD screen and toggle switch allows the operator to select his personal machine preferences. Power and work mode selection, self diagnostics, optional rear-view camera, maintenance check lists, start-up machine security, and video functions were integrated into the cluster to make the machine more versatile and the operator more productive.

PREFERENCE

Operators can fully customize their work environment and operating preferences to fit their individual needs.

Operator Comfort

In 9 series cabin you can easily adjust the seat, console and armrest settings to best suit your preferred comfort level. Other preference settings that add to overall operator comfort include the full automatic high capacity air conditioning system, transparent polycarbonate glass sun roof, large and easy to control sun visor, and radio / USB player.



Reduced Stress

The powerful climate control system and the optimized vent positions provide the operator with optimum air temperature. An advanced audio system with USB player, AM/FM stereo, plus remotely located controls is perfect for listening to music favorites. Operators can even talk on the phone with the hands-free cell phone feature.

Wide Cabin with Excellent Visibility

The newly designed cabin was conceived for more space, a wider field of view and operator comfort. Single piece right side glass improves visibility and operator comfort. Plus, the front defrosting system provides more comfortable working condition. Special attention was given to a clear, open and convenient interior with plenty of visibility on the machine surroundings and the job at hand.



may include optional equipment.



Enhanced Safety

Variable cabin guards offer enhanced operator safety. And the work lamps on the cab improved operator convenience at night time. Wide cat-walks, large handrails and anti-slip plates provide easy access to the cab and safer maintenance.



PROFITABILITY

9 series is designed to maximize profitability through improved efficiencies, enhanced service features and longer life components.

HiMATE Option

It's Convenient, Easy and Valuable

Hi-mate Hyundai's newly developed remote management system, utilizes GPS-satellite technology to provide customers with the highest level of service and product support available. Hi-mate enables users to remotely evaluate machine performance, access diagnostic information, and verify machine locations at the touch of a button.

What is benefits



Increase Productivity

It helps you operate machines in efficient. You can check the difference between total engine hours and actual working hours. See how productive your machines are and plan any required cost saving solutions. Hi MATE offers working information such as working / idling hours, fuel consumption and rate.



Convenient and Easy Monitoring

There is nothing much to do to monitor your machines. Just log on to the Hi MATE website or mobile application. Hi MATE allows you to watch your machines whenever and wherever you are.



Security

Protect your machines from theft or unauthorized usage with Hi MATE. If the machine moves out of the Geo-fence boundary, you will get alerts.


Easy Access

Concentrated engine filters, remote type fuel pre-filter and fuel cut valve, and wide open compartments make service more convenient. The auto greasing system at the touch of a button provides simple and easy maintenance.



Long-Life Components

9 series excavators were designed with bushings designed for long-life lube intervals (250 hrs) & polymer shims (wear resistant, noise reducing), long-life hydraulic filters (1,000 hrs), long-life hydraulic oil (5,000 hrs), more efficient cooling systems and integrated preheating systems.

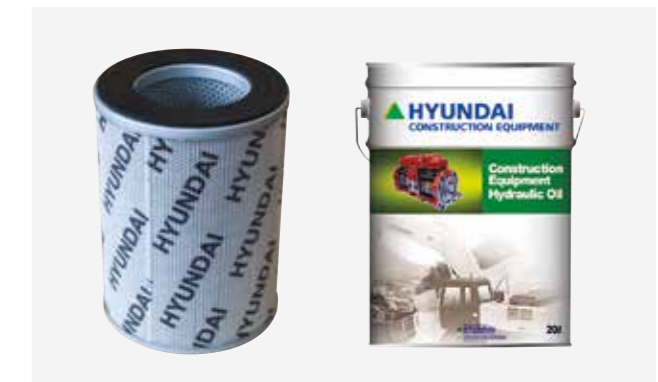

SPECIFICATIONS

ENGINE

Maker / Model	CUMMINS QSK23		
Type	Water-cooled, 4-cycle Diesel, 6-Cylinder in-line, Direct injection, Turbocharged, Charger air cooled, Low emission		
Rated flywheel horse power	SAE J1995 (gross)	760 HP (567 kW) at 1,800 rpm	
	J1349 (net)	740 HP (552 kW) at 1,800 rpm	
DIN	6271 / 1 (gross)	771 PS (567 kW) at 1,800 rpm	
	6271 / 1 (net)	750 PS (552 kW) at 1,800 rpm	
Max. torque	354 kgf·m (2,560 lbf·ft) at 1,350 rpm		
Bore × Stroke	170 × 170 mm (6.69" × 6.69")		
Piston displacement	23,000 cc (1,404 in ³)		
Batteries	4 × 12 V × 160 Ah		
Starting motor	2 × 24 V × 7.5 kW		
Alternator	24 V × 75 A		

HYDRAULIC SYSTEM

MAIN PUMP	
Type	Variable displacement axial piston pumps
Max. flow	3 × 531 ℓ/min (140.3 US gpm / 116.8 UK gpm) 1 × 123 ℓ/min (32.5 US gpm / 27.1 UK gpm)
Sub-pump for pilot circuit	Gear pump

Cross-sensing and fuel saving pump system.

HYDRAULIC MOTORS

Travel	Two speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING

Implement circuits	320 kgf/cm ² (4,550 psi)
Travel	350 kgf/cm ² (4,980 psi)
Power boost (boom, arm, bucket)	350 kgf/cm ² (4,980 psi)
Swing circuit	300 kgf/cm ² (4,270 psi)
Pilot circuit	40 kgf/cm ² (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS

No. of cylinder bore × stroke	Boom : 230 × 2,165 (9.1" × 85.2")
	Arm : 260 × 2,180 mm (10.2" × 85.8")
	Bucket : 240 × 1,792 mm (9.4" × 70.6")

DRIVES & BRAKES

Drive method	Fully hydrostatic type
Drive motor	Axial piston motor, in-shoe design
Reduction system	Planetary reduction gear
Max. drawbar pull	70,200 kgf (154,800 lbf)
Max. travel speed (high / low)	3.2 km/hr (2.0 mph) / 2.3 km/hr (1.4 mph)
Gradeability	35° (70%)
Parking brake	Multi wet disc

CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH) : Swing and arm, (RH) : Boom and bucket (ISO)
Traveling and steering	Two levers with pedals
Engine throttle	Electric, dial type

SWING SYSTEM

Swing motor	Axial piston motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc
Swing speed	5.6 rpm

COOLANT & LUBRICANT CAPACITY

	liter	US gal	UK gal
Fuel tank	1,475.0	389.7	324.5
Engine coolant	100.0	26.4	22.0
Engine oil	70.0	18.5	15.4
Swing device - gear oil	8.0	2.1	1.8
Final drive (each) - gear oil	20.0	5.3	4.4
Hydraulic system (including tank)	1,160.0	306.4	255.2
Hydraulic tank	670.0	177.0	147.4

UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

Center frame	X - leg type
Track frame	Pentagonal box type
No. of shoes on each side	52 EA
No. of carrier roller on each side	3 EA
No. of track roller on each side	8 EA
No. of rail guard on each side	2 EA

OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 7,550 mm (24' 9") boom, 3,400 mm (11' 2") arm, SAE heaped 6.70 m³ (8.76 yd³) HD bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.

MAJOR COMPONENT WEIGHT

Upperstructure	29,920 kg (65,960 lb)
Counterweight	20,400 kg (44,970 lb)
Boom (with arm cylinder)	12,640 kg (27,870 lb)

OPERATING WEIGHT

Type	Width mm (in)	Operating weight		Ground pressure kgf/cm ² (psi)
		kg (lb)		
Double grouser	700 (28")	118,000 (260,150)	1.09 (15.50)	
	800 (32")	118,670 (261,620)	0.96 (13.65)	
	900 (36")	119,470 (263,390)	0.87 (12.37)	


AIR CONDITIONING SYSTEM

The air condition system for the machine contains the fluorinated greenhouse gas with global warming potential of R134a. (Global Warming Potential : 1,430) The system hold 1 kg refrigerant consisting of a CO₂ equivalent 1.43 kg metric tonne. For more information, Please refer to the manual.

DIMENSION & WORKING RANGE

R1250-9 DIMENSION

7.55m Boom / 3.40m Arm

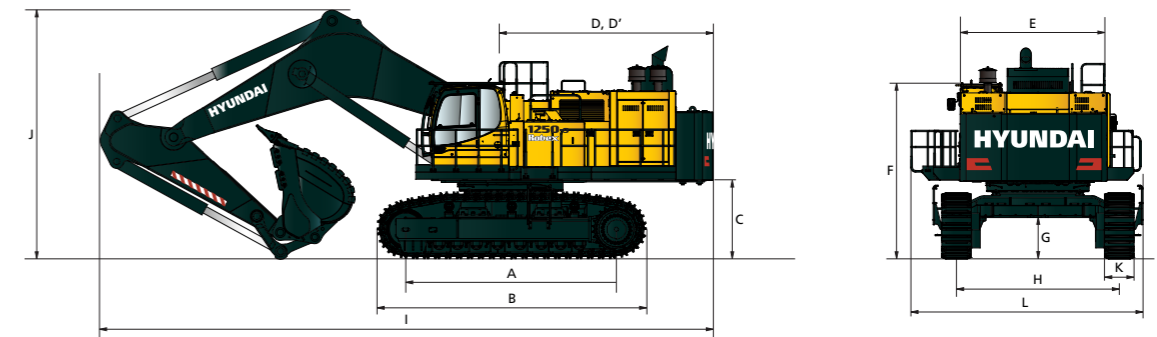


Unit : mm (ft-in)

A Tumbler distance	5,010 (16' 5")	Boom length	7,550 (24' 9")
B Overall length of crawler	6,400 (20' 12")	Arm length	3,400 (11' 2")
C Ground clearance of counterweight	1,825 (5' 12")	I Overall length	14,580 (47' 10")
D Tail swing radius	4,865 (15' 12")	J Overall height of boom	6,210 (20' 4")
D' Rear-end length	4,805 (15' 9")	K Track shoe Width	700 (2' 4")
E Overall width of upperstructure	3,520 (11' 7")	L Overall Width	5,560 (18' 3")
F Overall height of cab	STD 4,250 (13' 11") Cab riser (opt) 5,450 (17' 11")		
G Min. ground clearance	990 (3' 3")		
H Track gauge	3,900 (12' 10")		

R1250-9 WORKING RANGE


Unit : mm (ft-in)

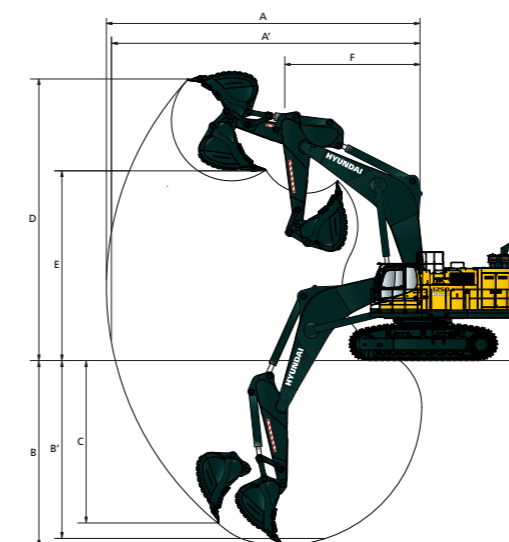


Boom length	7,550 (24' 9")
Arm length	3,400 (11' 2")
A Max. digging reach	13,760 (45' 2")
A' Max. digging reach on ground	13,380 (43' 11")
B Max. digging depth	8,010 (26' 3")
B' Max. digging depth (8' level)	7,840 (25' 9")
C Max. vertical wall digging depth	5,230 (17' 2")
D Max. digging height	12,420 (40' 9")
E Max. dumping height	7,790 (26' 5")
F Min. swing radius	6,550 (21' 6")

BUCKET SELECTION GUIDE & DIGGING FORCE


BUCKETS



Ⓜ
6.70



Ⓡ
6.00



Ⓜ
7.00

SAE heaped
m³ (yd³)

	Capacity m ³ (yd ³)		Width mm (in)	Weight kg (lb)	Tooth EA	Recommendation mm (ft · in)	
	SAE heaped	CECE heaped				7,550 (24' 9") Boom	3,400 (11' 2") Arm
Ⓜ	6.70 (8.76)	5.90 (7.72)	2,535 (99.8")	7,440 (16,400)	6	■	
Ⓡ	6.00 (7.85)	5.30 (6.93)	2,420 (95.3")	6,670 (14,700)	5	●	
Ⓜ	7.00 (9.16)	6.15 (8.04)	2,535 (99.8")	7,640 (16,840)	6	■	

Ⓜ : Heavy Duty
Ⓡ : Rock

- Applicable for materials with density of 2,100 kg/m³ (3,500 lb/yd³) or less
- Applicable for materials with density of 1,800 kg/m³ (3,000 lb/yd³) or less
- Applicable for materials with density of 1,500 kg/m³ (2,500 lb/yd³) or less
- ▣ Applicable for materials with density of 1,200 kg/m³ (2,000 lb/yd³) or less
- ▲ Applicable for materials with density of 900 kg/m³ (1,500 lb/yd³) or less
- Not Recommended

ATTACHMENT

Booms and arms are of all-welded, low-stress, full-box section design. 7,550 mm (24' 9"), boom and 3,400 mm (11' 2"), arms are available, Hyundai Bucket are all-welded, high-strength steel implements.

DIGGING FORCE


Boom	Length	mm (ft · in)	7,550 (24' 9")	Remark
	Weight	kg (lb)	10,540 (23,240)	
Arm	Length	mm (ft · in)	3,400 (11' 2")	
	Weight	kg (lb)	4,030 (8,880)	
Bucket digging force	SAE	kN	511.9 [558.5]	[]: Power Boost
		kgf	52,200 [56,950]	
		lbf	115,080 [125,540]	
	ISO	kN	581.5 [634.4]	
		kgf	59,300 [64,690]	
		lbf	130,730 [142,610]	
Arm crowd force	SAE	kN	423.7 [462.2]	
		kgf	43,200 [47,130]	
		lbf	95,240 [103,900]	
	ISO	kN	429.5 [468.6]	
		kgf	43,800 [47,780]	
		lbf	96,560 [105,340]	

Note : Boom weight includes arm cylinder, piping, and pin
Arm weight includes bucket cylinder, linkage, and pin



TRANSPORTATION PLAN

BASE MACHINE




Dimension mm (ft · in)			Weight
L	H	W	kg (lb)
6,885 (22' 7")	3,410 (11' 2")	3,580 (11' 9")	41,000 (90,390)

TRACK FRAME




Dimension mm (ft · in)				Weight
Shoe	L	H	W	kg (lb)
700 (24")	6,425 (21' 1")	1,585 (5' 2")	1,060 (3' 6")	14,120 (31,130)
800 (32")	6,425 (21' 1")	1,585 (5' 2")	1,110 (3' 8")	14,790 (32,610)
900 (35")	6,425 (21' 1")	1,585 (5' 2")	3,580 (11' 9")	15,590 (34,370)

BOOM ASSEMBLY (BOOM & PIPING & ARM CYLINDER & PINS)




Dimension mm (ft · in)				Weight
Boom	L	H	W	kg (lb)
7.55 m (24' 9")	7,930 (26' 0")	3,430 (11' 3")	1,500 (4' 11")	13,090 (28,860)

ARM ASSEMBLY (ARM & PIPING & BUCKET CYLINDER & CONTROL LINKAGE & PINS)




Dimension mm (ft · in)				Weight
Arm	L	H	W	kg (lb)
3.40 m (11' 2")	5,030 (16' 6")	930 (3' 1")	1,720 (5' 8")	6,390 (14,090)

BUCKET ASSEMBLY (BUCKET & PINS)



Dimension mm (ft · in)				Weight
m ³ (yd ³)	L	H	W	kg (lb)
Ⓜ 6.80 (8.89)	2,990 (9' 10")	2,070 (6' 9")	2,625 (8' 7")	7,610 (16,780)
Ⓡ 6.00 (7.85)	2,980 (9' 9")	2,055 (6' 9")	2,455 (8' 1")	6,910 (15,230)
Ⓜ 7.00 (9.16)	2,990 (9' 10")	2,180 (7' 2")	2,625 (8' 7")	7,810 (17,220)

CAB ASSEMBLY



Dimension mm (ft · in)			Weight
L	H	W	kg (lb)
1,960 (6' 5")	1,675 (5' 6")	1,290 (4' 3")	310 (0.680)

BOOM CYLINDER (2 EA WEIGHT : 1,090 × 2 = 2,380 KG)



Dimension mm (ft · in)			Weight
L	H	W	kg (lb)
3,615 (11' 10")	432 (1' 5")	340 (1' 1")	1,090 (1 EA) (2,400)

COUNTER WEIGHT



Dimension mm (ft · in)				Weight
Arm	L	H	W	kg (lb)
STD	3,520 (11' 7")	1,840 (6' 0")	980 (3' 3")	20,400 (44,970)

LIFTING CAPACITY

R1250-9

Boom : 7.55 m (24' 9") / Arm : 3.40 m (11' 2") / Bucket : 6.70 m³ (8.76 yd³) SAE heaped / Shoe : 700 mm (28") triple grouser

Lift-point height (m/ft)		Lift-point radius										At max. reach									
		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)		10.5 m (35.0 ft)		Capacity	Reach						
		kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	m (ft)					
9.0 m (30 ft)	kg																*11,820	*11,820	11.22		
	lb																	*26,060	*26,060	(36.8)	
7.5 m (25 ft)	kg									*19,080	*19,080	*5,410	*5,410	*11,740	*11,740				11.91		
	lb									*42,060	*42,060	*11,930	*11,930	*25,880	*25,880				(39.1)		
6.0 m (20 ft)	kg									*20,440	*20,440	*13,080	*13,080	*11,990	11,070				12.33		
	lb									*45,060	*45,060	*28,840	*28,840	*26,430	24,410				(40.5)		
4.5 m (15 ft)	kg					*35,080	*35,080	*26,820	*26,820	*21,810	*21,810	*18,390	15,960	*12,550	10,260				12.53		
	lb					*77,340	*77,340	*59,130	*59,130	*48,080	*48,080	*40,540	35,190	*27,670	22,620				(41.1)		
3.0 m (10 ft)	kg					*38,690	*38,690	*29,830	28,580	*22,990	20,650	*18,920	15,250	*13,440	9,950				12.52		
	lb					*85,300	*85,300	*63,780	63,010	*50,680	45,530	*41,710	33,620	*29,630	21,940				(41.1)		
1.5 m (5 ft)	kg					*40,150	38,810	*30,080	26,800	*23,630	19,540	*19,050	14,590	*13,820	10,130				12.28		
	lb					*88,520	85,560	*66,310	59,080	*52,100	43,080	*42,000	32,170	*30,470	22,330				(40.3)		
Ground Line	kg					*53,080	*53,080	*39,380	37,330	*29,920	25,630	*23,410	18,740	*18,430	14,110			*13,320	10,880	11.82	
	lb					*117,020	*117,020	*86,820	82,300	*65,960	56,500	*51,610	41,310	*40,630	31,110			*29,370	23,990	(38.8)	
-1.5 m (-5 ft)	kg	*48,020	*48,020	*47,840	*47,840	*36,640	*36,640	*28,260	25,020	*21,960	18,310							*12,340	*12,340	11.08	
	lb	*105,870	*105,870	*105,470	*105,470	*80,780	*80,780	*62,300	55,230	*48,410	40,370							*27,210	*27,210	(36.4)	
-3.0 m (-10 ft)	kg	*24,830	*50,120	*40,520	*40,520	*31,860	*31,860	*24,750	*24,750	*18,630	18,340							*10,290	*10,290	10.01	
	lb	*110,500	*110,500	*89,330	*89,330	*70,240	*70,240	*54,560	*54,560	*41,070	40,430							*22,690	*22,690	(32.8)	
-4.5 m (-15 ft)	kg	*35,060	*35,060	*30,200	*30,200	*24,340	*24,340	*18,400	*18,400									*5,580	*5,580	8.43	
	lb	*77,290	*77,290	*66,580	*66,580	*53,660	*53,660	*40,570	*40,570									*12,300	*12,300	(27.7)	
-6.0 m (-20 ft)	kg					*11,930	*11,930														
	lb					*26,300	*26,300														

1 | 1 | Lifting capacity are based on ISO 10567. | 2 | Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity. | 3 | The load point is a hook(standard equipment) located on the back of the bucket. | 4 | (*) indicates load limited by hydraulic capacity.

STANDARD / OPTIONAL EQUIPMENT

STANDARD EQUIPMENT

ISO Standard Cabin
All-weather steel cab with 360° visibility
Safety glass windows
Rise-up type windshield wiper
Sliding fold-in front window
Sliding side window (LH)
Lockable door
Hot & Cool box
Storage compartment & Ashtray
Cabin roof-steel cover
Radio / USB player
12 V power outlet (24 V DC to 12 V DC converter)
Handsfree mobile phone system with USB
Sun visor
Cabin FOPS/FOG (ISO/DIS 10262 Level 2)
FOPS (Falling Object Protective Structure)
FOG (Falling Object Guard)
Cabin lights
Computer aided power optimization (New CAPO) system
3-power mode, 2-work mode, user mode
Auto deceleration & one-touch deceleration system
Auto warm-up system
Auto overheat prevention system
Automatic Climate Control
Full automatic temperature controller
Defroster
Self-diagnostics system
Starting aid (air grid heater) for cold weather
Centralized Monitoring
8" LCD display
Engine speed or trip meter / Accel
Clock
Gauges
Fuel level gauge
Engine coolant temperature gauge
Hyd. oil temperature gauge
Warnings
Check engine
Overload
Communication error
Low battery
Air cleaner clogging
Indicators
Max power
Low speed / High speed
Fuel warmer
Auto idle
Two outside rearview mirrors
Air-suspension seat with heater
Pilot-operated slidable joystick

Console box height adjust system
Six front working lights, two rear lights
Air horn
Batteries (2 × 12 V × 150 AH)
Battery master switch
Removable clean-out dust net for cooler
Automatic swing brake
Automatic fuel line deaeration
Fuel pre-filter with fuel warmer
Boom holding system
Arm holding system
Track shoes (700 mm, 28")
Full track rail guard
Accumulator for lowering work equipment
Electric transducer
Lower frame under cover
Viscous fan clutch
Air compressor
Travel alarm

OPTIONAL EQUIPMENT

Fuel filler pump (50 ℓ/min)
Beacon lamp
Booms
7.55 m, 24' 9"
Arms
3.40 m, 11' 2"
Climate control
Air conditioner only
Heater only
Track Shoes
Double grousers shoe (800 mm, 32")
Double grousers shoe (900 mm, 36")
Pre-heating system, coolant
Tool kit
Rearview camera
Seat
Mechanical suspension seat
Mechanical suspension seat with heater
Air-suspension seat
Automatic lubrication
Hi-mate (Remote Management System)
Precleaner

* Standard and optional equipment may vary. Contact your hyundai dealer for more information.
 The machine may vary according to international standards.
 * The photos may include attachments and optional equipment that are not available in your area.
 * Materials and specifications are subject to change without advance notice.
 * All imperial measurements rounded off to the nearest pound or inch.

MEMO